AES/EBU & DMX 110 ohm

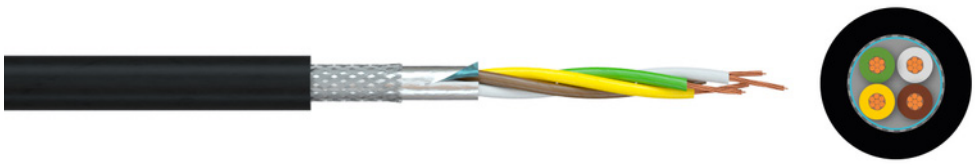

Application: Flexible cable for transmission of audio signals with low attenuation.

Construction and technical data:

Conductor material:	copper, bare
Conductor construction:	Class 5 = fine stranded - DIN EN IEC 60228 (VDE 0295)
Insulation:	polyethylene
Screen:	copper braid
Sheathing material:	PVC
Permitted outer cable temperature, fixed, °C:	-30 - +70 °C

The products and information presented here are for technical calculation only. They are subject to technical progress and in no way represent the ability of shipment. Outer diameters are approximately.

Cross section	2x0.34	4x0.34
Capacitance core/core (pF/m)	< 65	
Capacitance core/screen (pF/m S)	115	245
Screen coverage (%)	95	85
Insulation resistance (GOhm x km)	> 10	> 5
Core colours	wh + rd	wh + bn, gn + ye

AES/EBU & DMX 110 ohm

Protective conductor: no

part no.	part name	Rl [Ohm/km]	Ø [mm]	Cu	G [kg]
033831	(2X0.34)StDY BK	57	6.6	10.2	50
033833	(4X0.34)StCY BK	57	7.2	33	65

Rl	Conductor resistance
Ø	outer diameter approx.
Cu	Copper weight (GER)
G	net weight per 1000

© 2026 · Klaus Faber AG · all rights reserved KLAUS FABER AG · Europaallee 33 · 66113 Saarbrücken · Germany · T +49 681 9711 - 0