Medium voltage reeling cable
Faber® Crane-SR

DERZEIT KEIN BILD VERFÜGBAR. | NO IMAGE AVAILABLE.

Application: Flexible reeling cable for high and extreme mechanical stresses, e.g. torsional stress, deflection into different planes and high reeling speed. For laying indoors, outdoors, in industrial areas, harbours and open cast minings.

Bending radius: acc. to DIN VDE 0298-3

Construction and technical data:

Standard:	DIN VDE 0250-813 (with ref. to)
Conductor material:	copper, bare
Conductor construction:	Class 5 = fine stranded - DIN EN IEC 60228 (VDE 0295)
Insulation:	basic EPR
Electrical field control:	inner and outer semiconducting rubber layer
Arrangement of protective conductors:	split in the outer interstices
Material inner sheath:	rubber 5GM5
Torsion protection:	synthetic braid
Torsion:	+/- 25 °/m
Sheathing material:	rubber 5GM5
Colour of outer sheath:	red
Flame-retardant:	VDE 0482-332-1-2/IEC 60332-1-2
UV-resistant:	yes
Oil-resistant:	DIN EN 60811-404 / VDE 0473-811-404 / IEC 60811-404
Ozone-resistant:	yes
Max. temperature at conductor, °C:	90 °C
Max. short circuit temperature at conductor, °C:	250 °C
Permitted outer cable temperature, fixed, °C:	-50 - +80 °C
Permitted outer cable temperature, moved, °C:	-30 - +80 °C
Min. bending radius, fixed installation:	6 x Ø
Bending radius, moving application:	10 x Ø
Maximum tensile strength at the conductor:	20 N/mm²
Operating speed:	180 m/min.

© 2026 · Klaus Faber AG · all rights reserved KLAUS FABER AG · Europaallee 33 · 66113 Saarbrücken · Germany · T +49 681 9711 - 0

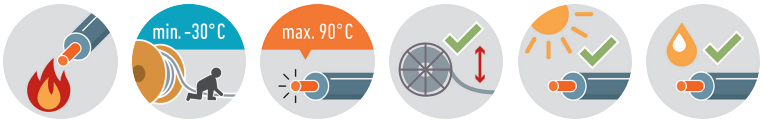

The products and information presented here are for technical calculation only. They are subject to technical progress and in no way represent the ability of shipment. Outer diameters are approximately.

Faber® Crane-SR 3.6/6 kV

Nominal voltage Uo: 3.6 kV

Nominal voltage U: 6 kV

Maximum permitted operating voltage in three-phase systems: 7.2 kV

Test voltage: 11 kV

part no.	part name	Rl [Ohm/km]	Ibl [A]	Ø [mm]	Fzp [N]	Fzd [N]	Cu	G [kg]
054576	3X50 + 3X25/3	0.386	202	49	2250	3000	1680	3610
054578	3X240 + 3X120/3	0.0801		75	10800	14400	8064	11640

Rl	Conductor resistance
Ibl	Ampacity in air (30 °C)
Ø	outer diameter approx.
Fzp	Tensile strength (permanent)
Fzd	Tensile strength (dynamic)
Cu	Copper weight (GER)
G	net weight per 1000

© 2026 · Klaus Faber AG · all rights reserved KLAUS FABER AG · Europaallee 33 · 66113 Saarbrücken · Germany · T +49 681 9711 - 0